



[Outline Dimension]


Unit: mm

Scale: 1/1

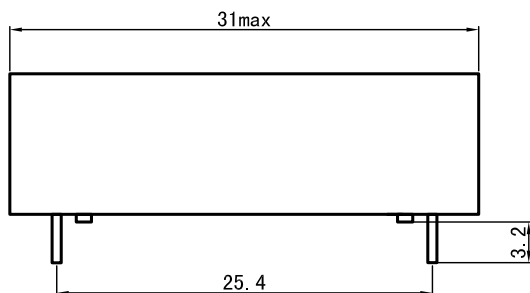

[Pin Layout]

[Top View]

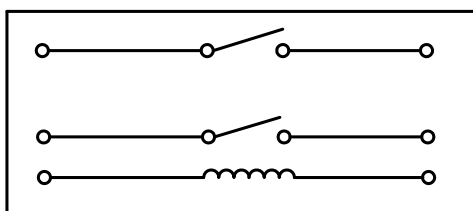

Order Information

HVR24-2A04-01

Coil Parameters		Relay Parameters	
1 Nominal coil voltage	24 VDC	1 Min Breakdown Voltage:	4K VDC
2 Max Operating voltage	29 VDC	2 Dielectric Strength coil/contact	4K VDC
3 Max Pull-in voltage	18 VDC	3 Insulation Resistance coil/contact	1.00E+10ohm
4 Min Drop-out voltage	2 VDC	4 Operate Time, incl. Bounce	1.0ms
5 Coil Resistance	1600ohm	5 Operating Temperature	-20~+70℃
Contact Parameters		6 Storage Temperature:	-35~+105℃
1 Max Contact Rating	100 W	7 Soldering Temperature	5 sec.max 260℃
2 Max Switch Voltage	1000VACpeak/VDC		
3 Max Switch Current	1.0 A		
4 Max Carrying Current	2.5 A		
5 Min Breakdown Voltage	4000 VDC		
6 Max Contact Resistance	150 mohm		

Remark:

Designed by

Gu Rui Nian

Checked by

Xu Deng Kui

Approved by

Xu Tao

Date

5th, Oct, 2010

TITLE

High Voltage Reed Relay

P/N

HVR24-2A04-01



Scale:

Page: 1/1