



HVR1A12-HG

- Mercury Wetted Reed Relay
- Coil Voltage 12V
- Breakdown up to 3KV

Misensor Tech (Shanghai) Co., Ltd
Add: No.25 Hangming Road Hangtou Town,
Pudong new district, Shanghai
TEL: 021- 60976200 FAX: 021-60976212
Http://www.Misensor.cn


[Outline Dimension]

Unit: mm

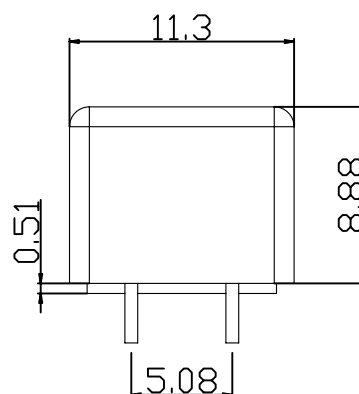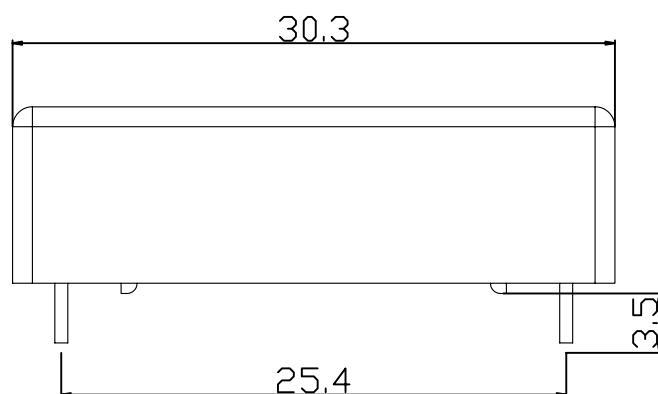

[Pin Layout]

[Top View]

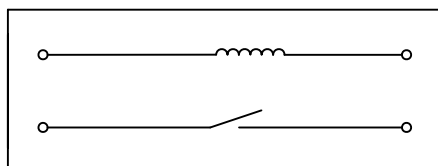

[Marking]

Misensor Reed Relay

HVR1A12-HG



Coil Parameters			Relay Parameters	
1 Nominal coil voltage	12	VDC	1 Min Breakdown Voltage	3000 VDC
2 Max Operating voltage	16	VDC	2 Dielectric Strength coil/contact	3000 VDC
3 Max Pull-in voltage	9.0	VDC	3 Insulation Resistance coil/contact	1.00E+10ohm
4 Min Drop-out voltage	1.0	VDC	4 Operate Time	2.0ms
5 Coil Resistance	620	ohm	5 Reset Time	1.5ms
Contact Parameters			6 Capacitance Across Contacts	0.3pF
1 Max Contact Rating	50	W	7 Storage Temperature	-35~+105℃
2 Max Switch Voltage	1000	VACpeak/VDC	8 Operating Temperature	-20~+70 ℃
3 Max Switch Current	2.0	A	9 Soldering Temperature	5 sec.max 260℃
4 Max Carrying Current	3.0	A		
5 Min Breakdown Voltage	3000	VDC		
6 Max Contact Resistance	50	mohm		

Version: 01

Designed by

Checked by

Approved by

Date


2013-05-30

TITLE

Misensor Reed Relay

P/N

HVR1A12-HG



Page: 1/1