


[外形尺寸] Outline Demension

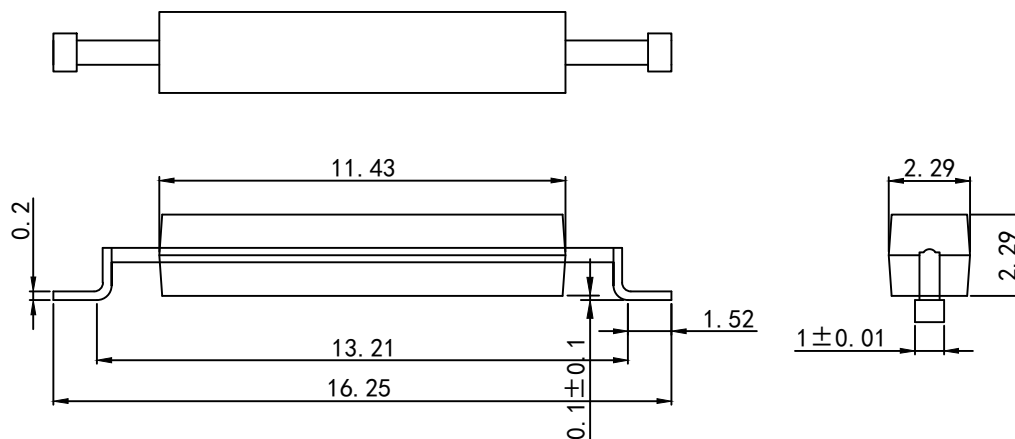

ELECTRICAL RATINGS		Contact Form A - Normally Open	
Contact Rating (1)	Power	Watts-max	10
Voltage	Switching	Vdc-max	200
	Breakdown	Vdc-min	250
Current	Switching	A-max	0.5
	Carry	A-max	1.0
Resistance	Contact, Initial	Ohms-max	0.12
	Insulation	Ohms-min	10^{12}
Capacitance	Contact	pF-typ	0.2
Temperature	Operating	°C	-40 to +125
	Storage (2)	°C	-65 to +125


OPERATING CHARACTERISTICS			
Time	Operate (3)	ms	0.5
	Release (3)	ms	0.1
Shock	11ms 1/2sine	G-max	100
Vibration	50-2000Hz	G-max	30
Resonant Frequency		kHz-typ	6.5

MAGNETIC CHARACTERISTICS			
Rating Sensitivity (4)		Ampere Turns (AT)	100
Test Coll			30


Order Information		
MS02-01	X	XX - XX (MIN AT) (MAX AT)
OPTIONS	1. B (Bulk) 2. R (Tape reel)	10-25

备注 Remark: RoHS	设计 Designed by	zhangxiaojing	品名 TITLE		
	审查 Checked by	Xu Deng Kui	接近开关 Proximity Switch		
	批准 Approved by	Xu Tao	产品型号 P/N		
	日期 Date	2013. 11. 06	MS02-01		
				版本 Version: V1.0	页次 Page: 1/1


[外形尺寸] Outline Dimension

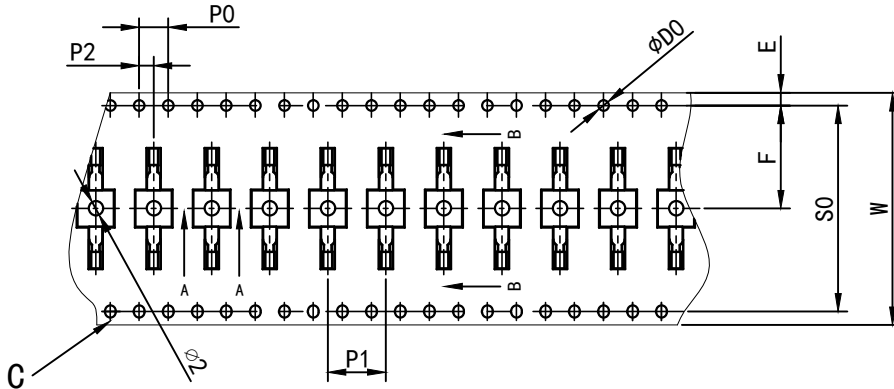


外观	尺寸
E	1.75 ±0.10
F	14.20 ±0.10
S0	28.40 ±0.15
P2	2.00 ±0.10
ØD0	1.50 ±0.10
P0	4.00 ±0.10
10Po	40.00 ±0.20

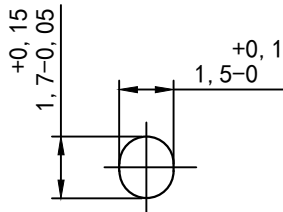

C (5;1)






A-A



B-B

W	32.00 ±0.30
P1	8.00 ±0.10
A0	1.80 ±0.10
B0	16.50 ±0.10
K0	1.80 ±0.10
t	0.35 ±0.05



备注 Remark:

RoHS

设计 Designed by zhangxiaojing

审查 Checked by Xu Deng Kui

批准 Approved by Xu Tao


日期 Date 2013. 11. 06

品名 TITLE

接近开关 Proximity Switch

产品型号 P/N


MS02-01



版本 Version: V1.0

页次 Page: 1/1

SOLDERING INFORMATION

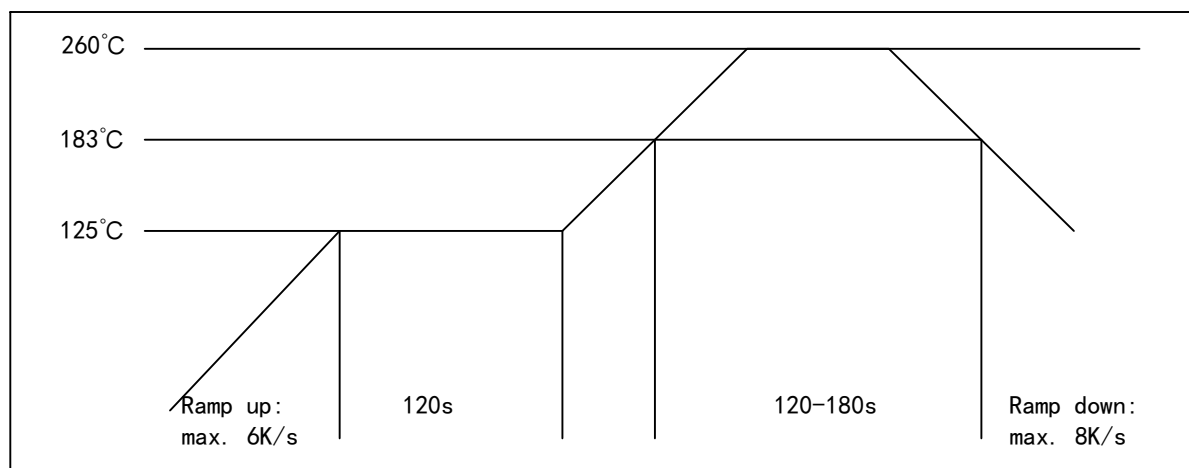

备注 Remark:

RoHS

设计 Designed by zhangxiaojing

审查 Checked by Xu Deng Kui

批准 Approved by Xu Tao


日期 Date 2013. 11. 06

品名 TITLE

接近开关 Proximity Switch

产品型号 P/N

MS02-01



版本 Version: V1.0

页次 Page: 1/1